sənil İnalqmi E 101

A single Surgical Kit


ISY KONE, BT SAFE, BT NANO

SURGICAL KIT

ÓNICK CNIDE









education and related activities.

NZED GLOBALLY YJATI NI 3DAM

and subsequent modifications and additions. CE marked product, in accordance with Directive 93/42/EEC

comprehensive solutions in applied research, engineering, Specialized professionals are taking care to offer

and services meet the high expectations of our customers

We constantly ensure that the quality of our products



and UNI EN ISO 13485. BIOTEC is certified UNI EN ISO 9001

MATRYS YTIJAUQ CERTIFIED

realning course. tollow-up or information, promoting periodic and ad-hoc BTK is always at your disposal for any request for further

high patient satisfaction rates.

and maximize clinical experience with the aim to achieve sustainable supported by experienced professionals in order to leverage know-how

A program for individual case planning and execution

SIMPLICITY REDEFINED **ONE KIT**

STORAGE OF SURGICAL **INSTRUMENTS**

LOFFOM OS ON

They are made of a highly shock-proof thermoplastic, which is well established in medical applications and the material is suitable for frequent sterilization in the autoclave.

DENSE BONE PROTOCOL (TAPPING)


The evaluation of bone quality is made by using radiograph imaging techniques and clinical examination.

Dense cortical bone provides higher implant primary stability.

Whereas cancellous bone provides less initial stabilization.

This has to be taken into account when preparing the implant site.

Moreover, it influences the time required to develop osseointegration.

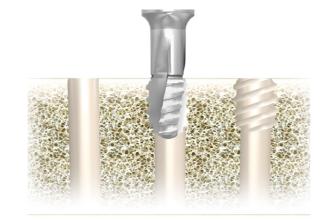

The surgical trays are used for the secure storage and sterilization of the surgical and auxiliary instruments of the BTK dental implant systems.

BTK PERSONAL TUTOR

CHARACTERISTICS

OF SURGICAL DRILLS

is always the lower or upper end of the strip

order to increase safety drill stops may also be used

implant site.

• all final drills offer attachment of suitable drill stops

• the respective length to the corresponding depth strip

• drills and taps should be replaced after max. 20 applications

• drilling must proceed with sharp drills, intermittently at 500 rpm – 600 rpm

• the laser strips correspond to the length of the implant selected. However, in

• For implants with a length of 18 mm, the corresponding depth markings

on drills are not provided such as the suitable drill stops are not available. It

is advisable to prepare the implant site taking into account that the length of the drill, from the tip and up to the retention collar, is equal to 18.8 mm. It is

responsibility of the clinician to evaluate based on the clinical case, morphology

and bone quality, as well as the inclination of the implant, how to prepare the

ISO CONNECTION Contra-angle dental handpiece DRILL IDENTIFICATION Diameter and product reference number STAINLESS STEEL Multiple use **RETENTION COLLAR**

Drill stop attachment **BLACK LASER STRIPS** Lenght identification

16 mm 14 mm 12 mm 10 mm

MULTI-BLADE DESIGN

Guidance and chip removal

6 mm


5 mm


OVERLENGHT Up to 1 mm longer than implant

FOLLOW US ON

visit btk.dental

INSTRUMENTS KIT CODE 624NA001

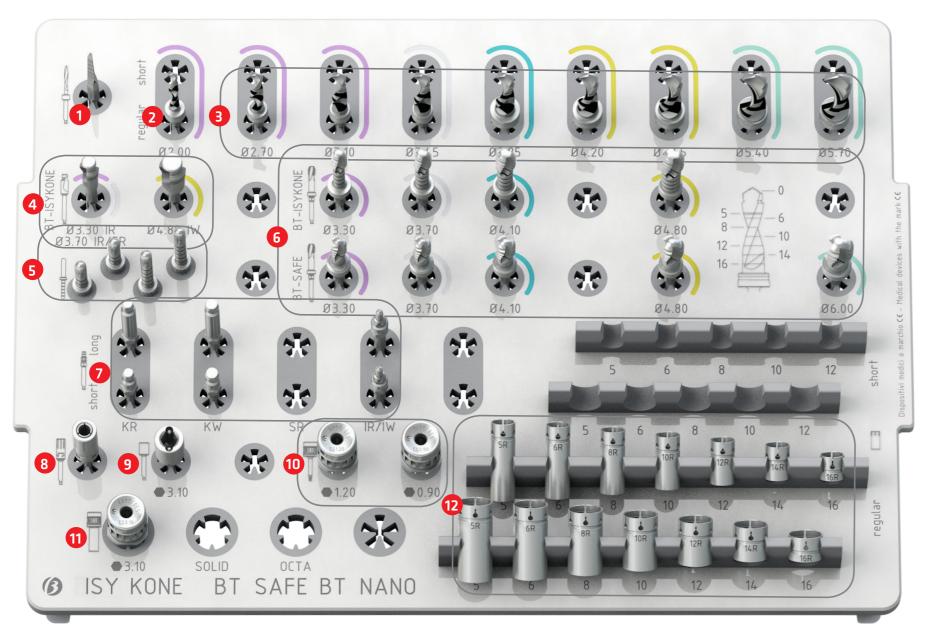

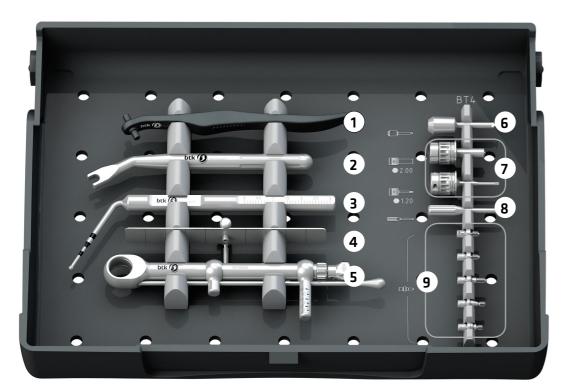

1 GUIDE SHAFT 502MA002 | Ø 2.5 mm

2 ANGLED WRENG

ANGLED WRENCH 30° 502MA003 HEX 3.10

3

DEPTH GAUGE 540MA011 Ø 1.8 mm L108 mm 30°

(4)

SURGICAL GUIDE BT4502MA006 (PIN Ø2.5mm)

TORQUE WRENCH JD, REVERSIBLE
501 JD003 90 Ncm

6
BONE PROFILER HS (BT4)
435HS430 | Ø 4.3 mm L25 mm

SCREWDRIVER JD (BT4)

530JD021 HEX 2.0 L10 mm 530JD014 HEX1.20 L15mm Slim Shank

8

PARALLELISM PIN (BT4)

540MA007 | M1.4 L26mm

9 BONE PROFILER GUIDE 435EN001 | EN

435ER001 ER 435ER001 IR 435KR001 KR 435KW001 KW

DRILLS 82.70 426HR270 Ø 2,7 mm L36.5 mm Ø3.10 _ 426HR310 Ø 2,75 - 3,10 mm L36.5 mm Ø3.45 = 426HR345 Ø 3,45 - 3,05 mm L36.5 mm Ø3.85 426HR385 Ø 3,85 - 3,4 mm L36.5 mm 84.20 426HR420 Ø 4.2 - 3.7 mm L36.8 mm Ø4.55 = 426HR455 Ø 4.55 - 4 mm L36.8 mm 426HR540 Ø 5.4 - 4.7 mm L36.8 mm Ø5.70 = 426HR570 Ø 5.7 - 4.95 mm L36.8 mm COUNTERSINK ISY KONE INT-EXT Ø3.30-3.70 Int 434HS330 L31 mm Ø 3.3 mm (INT) Ø 3.7 mm (INT/EXT) Ø4.8 Int 434HS480 L31 mm Ø 4.8 mm (INT)

PARALLELISM PIN/

540MA014 Ø 2-2,5 mm

540MA019 Ø 2-2,5 mm

L36 mm 2 pcs

L26 mm 2 pcs

DEPTH GAUGE

SHARP LANCE DRILL


TWIST DRILL

Ø2.00

401HR202 Ø 2 mm L33 mm

82.00

426HR200 Ø 2 mm L36.5 mm

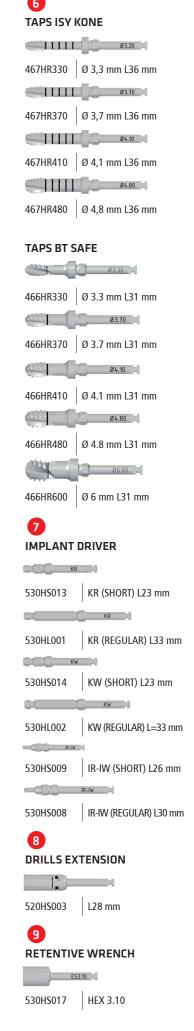

10

1

530JD033

DRILL STOP

12

6R

8R

10R

12R

14R

SR SR

8R

10R

12R

SCREWDRIVER JD

530JD012 HEX 0.90 L15 mm

530JD005 HEX 1.20 L15 mm

ISO/HEX3.10-JD L10mm

MANUAL WRENCH - JD

518NA505 H5 mm Snap Fit

518NA506 H6 mm Snap Fit

518NA508 H8 mm Snap Fit

518NA510 H10 mm Snap Fit

518NA512 H12 mm Snap Fit

518NA514 H14 mm Snap Fit

518NA516 H16 mm Snap Fit

518NA705 H5 mm Snap Fit

518NA706 H6 mm Snap Fit

518NA708 H8 mm Snap Fit

518NA710 H10 mm Snap Fit

518NA712 H12 mm Snap Fit

518NA714 H14 mm Snap Fit

518NA716 H16 mm Snap Fit